


基本資料

主題名稱	卡威科技 ZE6000 網路顯示控制器產品規格說明		
聯絡人		電話/分機	傳真
公司名稱	E_mail		
地址			

AV over Ethernet adaptor


產品名稱	網路顯示控制器	產品型號	ZE6000
產品特色			
<p>Application :</p> <p>Digital Signage / Media Price Checker / Training Center / Kiosk</p>			

詳細規格內容


Power Brick	AC adaptor input	AC100V-240V, 50~60Hz
	DC power output	12Vdc @ 1.5A
Power Consumption		3 watts + 10 watts full USB bus power
	LED indicators	Power LED
		Network Connect LED
		Identification LED
Input/output connectors	Ethernet input	x 1 RJ-45, 10/100/1000 Mb Ethernet
	USB downstream ports	x 4 USB A type (USB 2.0)
	Video output	x 1 DVI-I connector for VGA or DVI
	Audio output 1	x 1 Line out phone jack
	Audio output 2	x 1 headphone
	Audio input	x 1 Microphone
Max. Video resolution	FHD	2048 x 1152
Environmental	Operating temperature	0 °C ~ 35 °C
	Non-operating temperature	-30 °C ~ 60 °C
	Operating Humidity	10% ~ 90% (non-condensing)
	Non-operating Humidity	5% ~ 95%
	Cooling	Fanless

Mechanical	Mounting	8 VESA holes; 4 spaced at 100mm centers and 4 spaced at 75mm centers
	Dimensions W x D x H	115mm x 115 mm x 17.8 mm
	Weight	TBD
Server OS supporting	XP, Vista, Win7, Win Server 2008R2, Linux	
System requirement	WMS 2011 / MiniFrame SoltXpand 2011 / Useful Multiseat 2011	
Regulatory	CB, FCC, CE, BSMI	
Compliance	WEEE, RoHS	
Optional	DVI to VGA adaptor / DVI to DVI cable(25cm) / DVI to VGA cable(25cm)	
* Specification is subject to be changed without prior notice.		

System Structure (Each user can work independently)

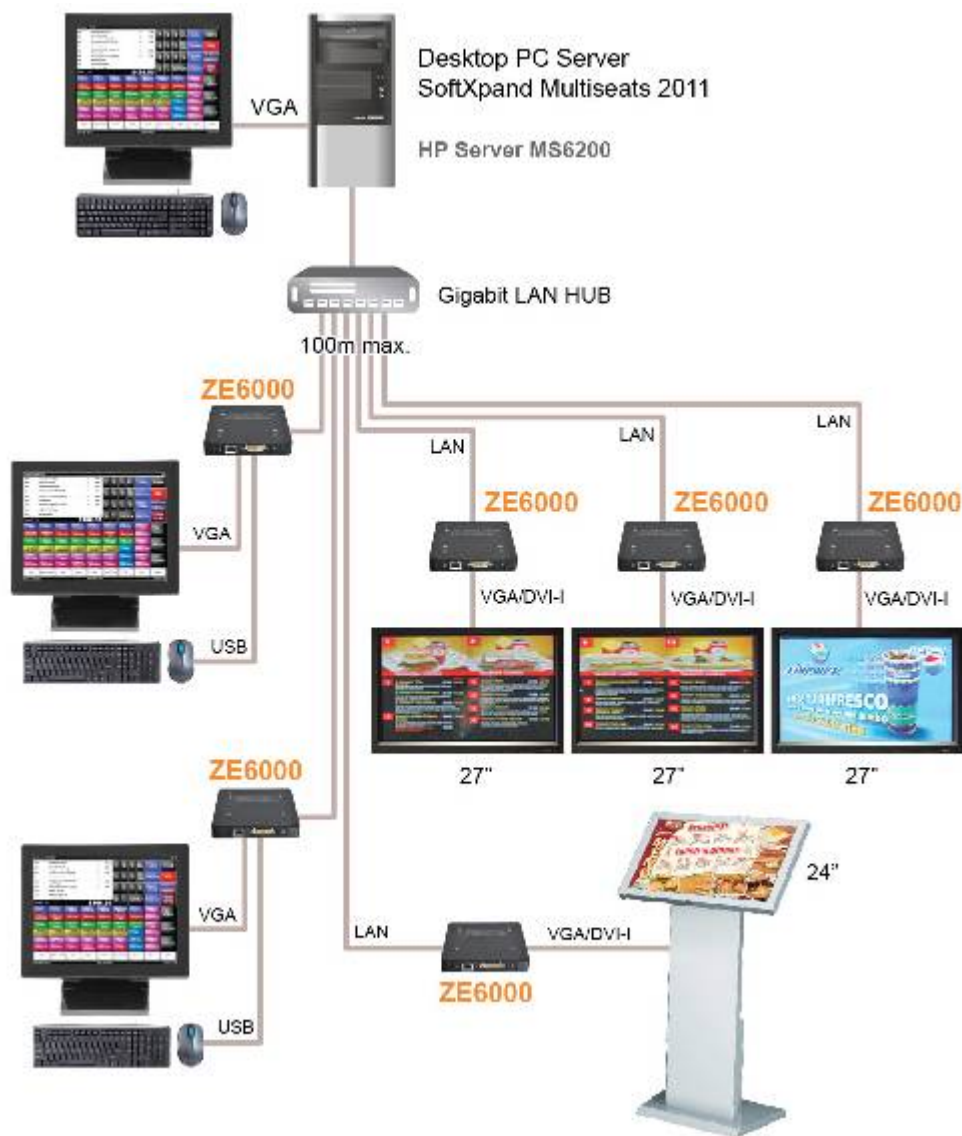


I/O indicator (unit: mm)

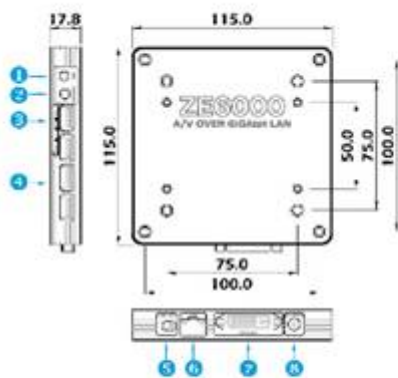

- | | |
|---|------------------------------------|
| 1. Microphone | 4. USB A type down stream port x 4 |
| 2. Headphone | 5. Line out |
| 3. LED indicators
Power LED
Network connect LED
Identification LED | 6. RJ-45 Ethernet connector |
| | 7. DVI-I Connector |
| | 8. DC 12V in |

Cable installation

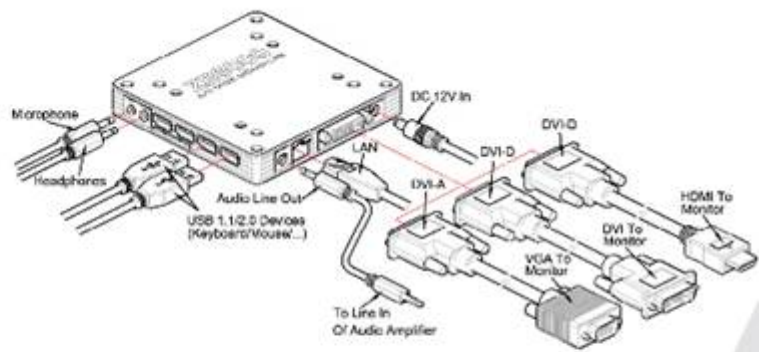

VESA Mounting (Patent applying)

